


direct operated solenoid valves

coil 31 mm

general information	
ambient temperature	- 10°C to + 50°C
response time	6 - 18 ms
mounting	in any position
standard seal materials*	NBR, FPM, EPDM
dimensions	see page 2/2
coil data	see page 2/2
connector data	see page 2/2

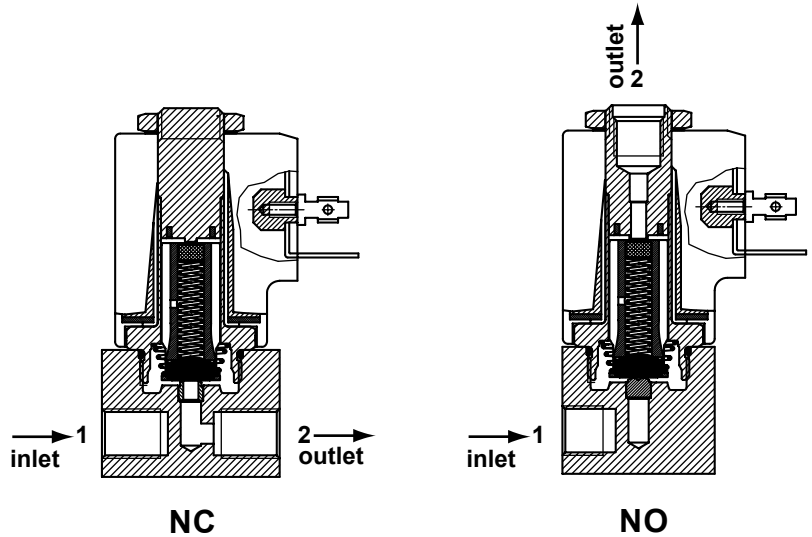


\* other seal materials on request

function	symbol	orif. mm	*Kv	pressure range (bar)			nominal power		TABLE A main code	
				min.	max. DC	max. AC	Watt DC	V.A. AC		
								inr.		hol
<b>2/2 normally closed (NC)</b> 		0.8	0.5	0	60	80	10	21.5	13.5	<b>Q2B108</b>
		1.2	1.3	0	45	70	10	21.5	13.5	<b>Q2B112</b>
		1.6	1.7	0	35	60	10	21.5	13.5	<b>Q2B116</b>
		2.4	3.5	0	15	30	10	21.5	13.5	<b>Q2B124</b>
		3.0	4.5	0	10	18	10	21.5	13.5	<b>Q2B130</b>
<b>2/2 normally open (NO)</b> 		0.8	0.5	0	40	40	10	21.5	13.5	<b>Q2B208</b>
		1.2	1.1	0	35	35	10	21.5	13.5	<b>Q2B212</b>
		1.6	1.4	0	20	20	10	21.5	13.5	<b>Q2B216</b>
		2.4	3.0	0	10	10	10	21.5	13.5	<b>Q2B224</b>
		3.0	3.5	0	8	8	10	21.5	13.5	<b>Q2B230</b>

\*l/min. of water with ΔP of 1 bar

order code



main code
see table A on this page

seals	
code	material
B	NBR
V	FPM
E	EPDM

manual override	
code	type
0	none
1	brass screw
2	palm button
3	push button



coil code
see table B on page 2/2

**FLO CONTROL**

Solenoid Valves



direct operated solenoid valves  
coil 31 mm

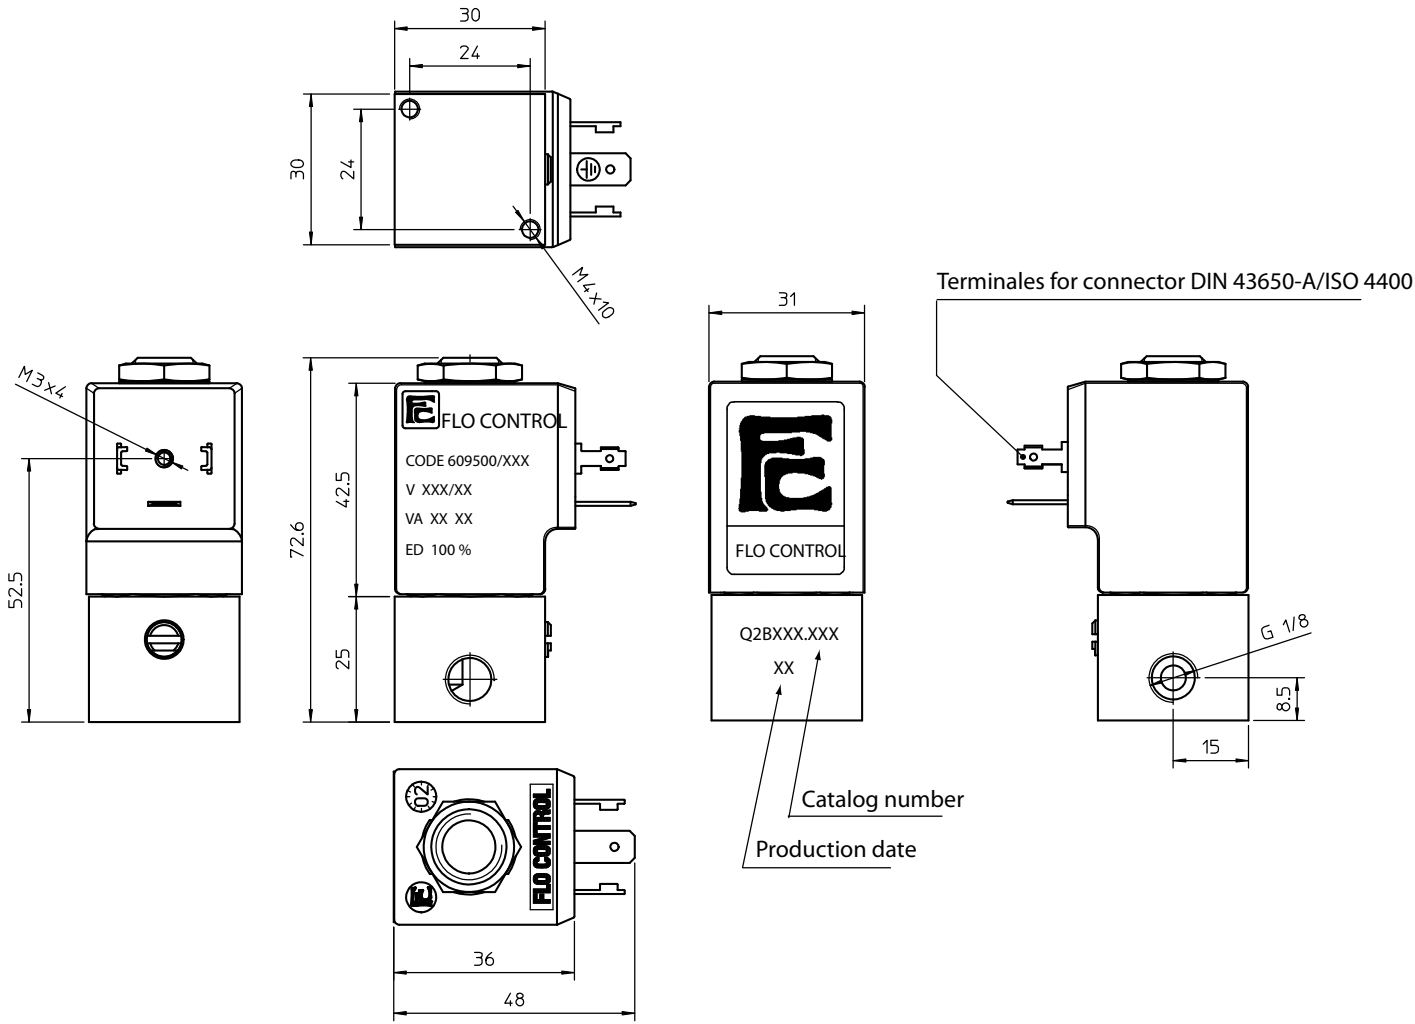

<b>weight</b>	220 g
---------------	-------

coil code	TABLE B			
	*voltages	code		
		~ 50 Hz	~ 60 Hz	= DC
	12	-	-	666
	24	611	644	671
	48	616	-	676
	110	621	-	681
	115	-	653	-
	220	631	-	-
	230	638	659	-
	380	640	-	-

coil specification	
wire insulation	class H180° C
encapsulation	class F155° C
encapsulation mat.	nylon
energising duration	100% at +20° C ambient
voltage tolerance	- 10% +15% of nominal voltage
*power consumption	AC 13,5 VA - DC 10 Watt
electrical connection	DIN 43650/A (2P+ earth)
cable connection	Pg 9 (for cable dia. 6-8mm)
protection class	IP 65 (with connector)

\* other voltages and wattages on request

**connector** (not included, must be ordered separately) 

<b>code</b>	Z10031
-------------	--------

**FLO CONTROL**  
Solenoid Valves

